

Storm valve Nod.cast-Angle-including Shut.Off.Device

Storm valves, angle type, DIN-HNA PN 04

With shut-off-device.


Nod.cast iron-EN-JS1049

Disc in bronze + rubber sealing

Flanges acc. to DIN PN10

material specification:

body:	EN-GJS-400-18U-LT	EN-JS1049-GGG40.3
bonnet:	EN-GJS-400-18U-LT	EN-JS1049-GGG40.3
flap:	CuSn5Zn5Pb5-C (with rubber sealing)	CC491K-Bronze
stem:	CuZn35Ni3Mn2AlPb	CW710R

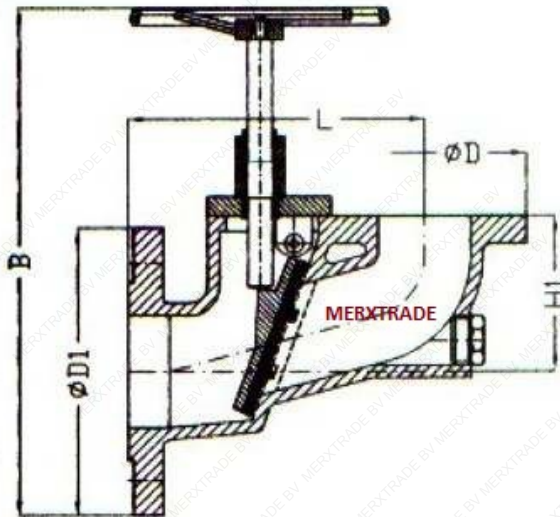

MXT-111207001

DN x DN 1	L	B	H1	Ø D	PCD	Holes	Ø D 1	PCD 1	Holes 1	KG
050 x 080	180	360	90	165	125	4 x 18	200	160	8 x 18	13
065 x 100	200	370	100	185	145	4 x 18	220	180	8 x 18	15
080 x 125	215	385	108	200	160	8 x 18	250	210	8 x 18	21
100 x 150	260	460	130	220	180	8 x 18	285	240	8 x 22	26
125 x 175	290	530	152	250	210	8 x 18	315	270	8 x 22	37
150 x 200	330	580	176	285	240	8 x 22	340	295	8 x 22	45

Information provided as an indication and subject to possible modification.
Colours and details can be different then shown in data sheets or pictures.
Merxtrade BV has no liability for any damages by use off any information,
displayed on these pages.