

Self closing drain valve with push button

Design Special design - with spring and push button
Face to Face Acc. to below mentioned dimension table
Flange Dimension DIN Flange acc. to EN 1092-3/A (DIN 2501)



Bronze self closing drain valves are mainly used aboard ships and are spring-loaded with push button for release and locking nut. The button must be pushed to operate the valve. After release of push button, the valve will automatically and instantly close.


Application: Oil, lubricant and fuel tanks.

Pressure & Temperature Ranges

Bore	Pressure Rating	Working Pressure [bar]	Hydro Test Pressure [bar]	
		80 °C	Casing	Closure
DN 20 - DN 25	PN10	10	15	11

Material Specifications

Part No.	Component	Material		
1	Body	CuSn5Zn5Pb5-C	CC491K	RG5
2	Stem	CuZn35Ni3Mn2AlPb	CW710R	Som59
3	Spring	1.4310	1.4310	1.4310
4	Locking	CuSn5Zn5Pb5-C	CC491K	RG5
5	nut O-ring	NBR	NBR	NBR

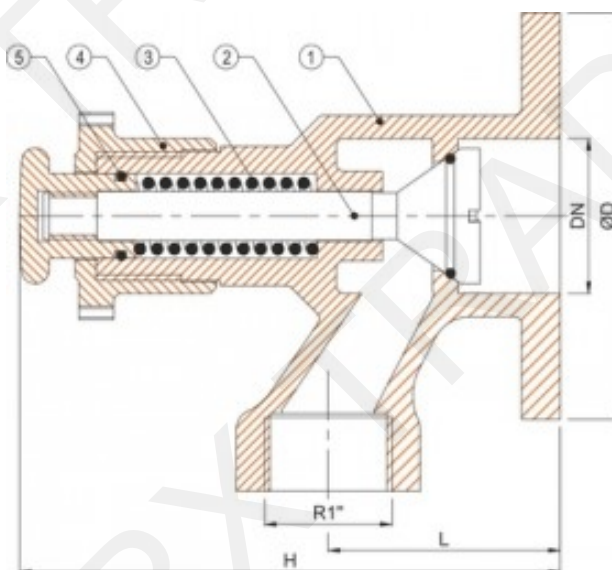

Dimensions

DN[mm]	ØD[mm]	Ød[mm]	L[mm]	H (open)[mm]	Weight[kg]
20	105	40	60	140	2,2
25	115	40	60	140	2,4

Information provided as an indication and subject to possible modification. Colours and details can be different then shown in data sheets or pictures. Merxtrade BV has no liability for any damages by use off any information, displayed on these pages.