

DIN FIREFIGHTING AND DECKWASH VALVE 30° BRONZE

Technical Features

Standard	30° angle type, screwed bonnet, without coupling
Face to face	Acc. to below mentioned dimension table
Inlet Flange Dimension	DIN Flange acc. to EN 1092-3/A (DIN 250°)
Outlet Threaded End	BSP-male threaded acc. to ISO 228/1

Bronze fire fighting valves oblique type, screwed bonnet and double sealing. Inlet DIN flat face flanged, outlet BSP-male threaded


Application: Water and for coupling of fire hose.

Pressure & Temperature Ranges

Bore	Pressure Rating	Working Pressure [bar]
DN 25 - DN 80	PN16	60 °C

Material Specifications

Part No.	Component	Material		
1	Body	CuSn5Zn5Pb5-C	CC491K	RG5
2	Bonnet	CuSn5Zn5Pb5-C	CC491K	RG5
4	Disc	CuSn5Zn5Pb5-C	CC491K	RG5
4	Disc sealing ring	NBR	NBR	NBR
5	Stem	CuZn39Pb3	CW614N	Ms58
7	Bonnet gasket	Asbestos-free	Asbestos-free	Asbestos-
8	Gland packing	Graphite	Graphite	Graphite
8	Handwheel (red bornished)-STD	EN-GJL250	EN-JL1040	GG25

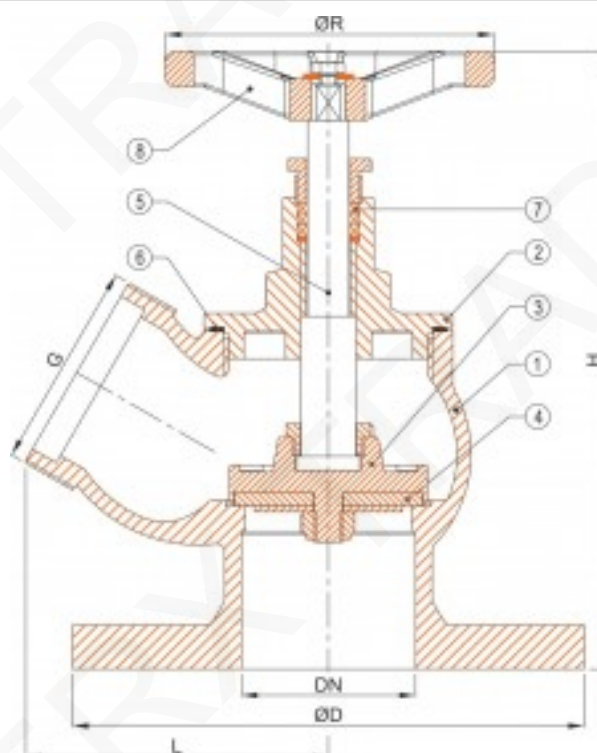

DN [mm]	G [°]	ØD [mm]	L [mm]	H [open] [mm]	ØR [mm]	Weight [kg]
25	1	115	-	140	80	1.7
32	1¼	140	-	155	80	2.6
40	1½	150	85	203	100	4.1
50	2	165	93	214	100	5.5
65	2½	185	110	250	120	7.0
80	3	200	-	205	160	8.5