

**DIN FIRE-FIGHTING AND DECKWASH VALVE - STRAIGHT TYPE BRONZE**

**Technical Features**

<b>Standard</b>	Straight type, screwed bonnet, without coupling
<b>Face to Face</b>	Acc. to below mentioned dimension table
<b>Inlet Flange Dimension</b>	DIN Flange acc. to EN 1092-3/A (DIN 2501)
<b>Outlet Threaded End</b>	BSP-male threaded acc. to ISO 228/1

**Bronze fire fighting valves straight type, screwed bonnet and double sealing. Inlet DIN flat face flanged, outlet BSP-male threaded.**


**Application: Water and for coupling of fire hose.**

**Pressure & Temperature Ranges**

Bore	Pressure Rating	Working Pressure [bar]	Hydro Test Pressure [bar]	
		60 °C	Casing	Closure
DN 25 - DN 80	PN16	16	24	17.6

**Material Specifications**

Part No.	Component	Material		
1	Body	CuSn5Zn5Pb5-C	CC491K	RG5
2	Bonnet	CuSn5Zn5Pb5-C	CC491K	RG5
3	Disc	CuSn5Zn5Pb5-C	CC491K	RG5
4	Disc sealing ring	NBR	NBR	NBR
5	Stem	CuZn39Pb3	CW614N	Ms58
6	Bonnet gasket	Asbestos-free	Asbestos-free	Asbestos-free
7	Gland packing	Graphite	Graphite	Graphite
8	Handwheel (red bornished)-STD	EN-GJL250	EN-JL1040	GG25

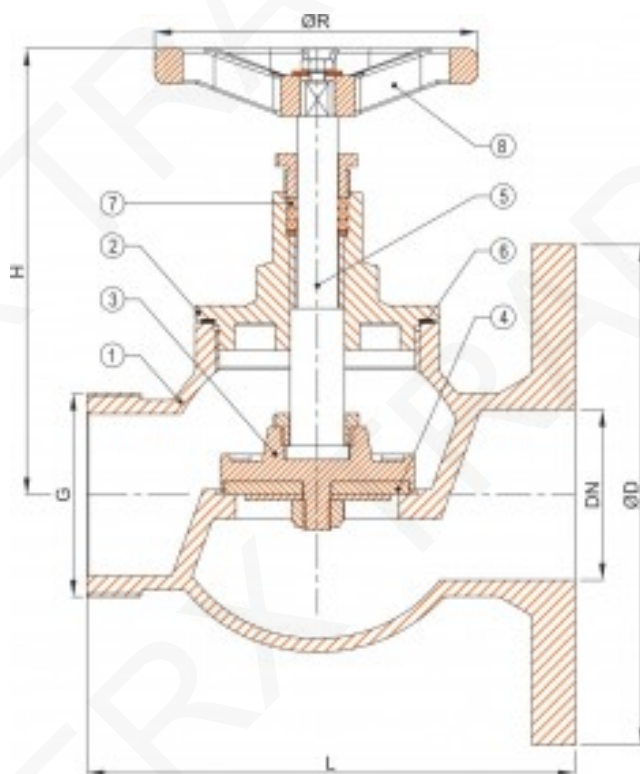

DN [mm]	G ["]	ØD [mm]	L [mm]	H [mm]	ØR [mm]	Weight [kg]
25	1	115	-	105	80	1.7
32	1¼	140	-	125	80	2.6
40	1½	150	135	150	100	4.0
50	2	165	160	160	100	6.0
65	2½	185	180	190	120	8.0
80	3	200	-	200	160	9.5