

Pipe Couplings Wide Range Long



Material

High quality ductile iron GGG 450-10.

Rubber gaskets

EPDM Grade E / WA as per BS EN 681-1:1996.
NBR Rubber is available on request.

Features

- Working pressures up to 16 bars.
- Angular deflection 6° for couplings.
- DIN, BS and ANSI in one flange design.


Coating

High Quality epoxy, providing a long term corrosion protection along with resistance to abrasion and impact.
Other coatings are available on request.

Bolts and nuts

High grade Steel 8.8 fasteners, coated with Dacromet™ Grade B 500. Dacromet™ coating is based on zinc and aluminium flakes that are passivated throughout the entire layer providing excellent anticorrosion characteristics.

Stainless steel bolts and nuts are available on request.

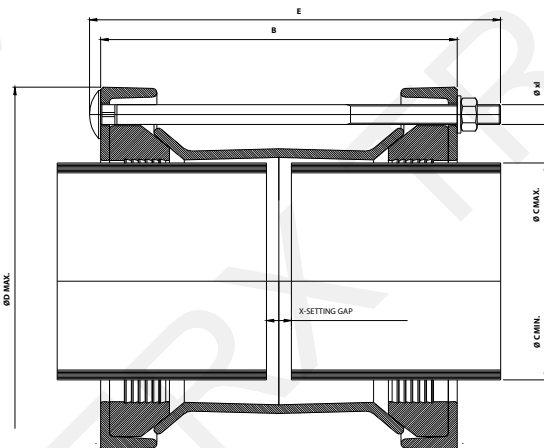

Coupling Type	Range Ø C		Sleeve L. mm	Bolts			B mm	Ø D mm	E mm	X		Weight kg
	Min. mm	Max. mm		No. mm	D mm	l mm				Min. mm	Max. mm	
DN50-2"	43	64	200	4	M 12	290	260	150	297	20	120	6,4
DN65-2,5"	63	84	200	4	M 12	290	260	174	297	20	120	7,8
DN80-3"	85	107	200	4	M 12	290	260	198	297	20	120	9,5
DN100-4"	107	134	200	4	M 16	320	270	240	328	20	110	13
DN125-5"	132	160	200	4	M 16	320	270	271	328	20	100	14,5
DN150-6"	158	192	200	4	M 16	320	288	316	328	20	100	20,7
DN175-7"	192	227	200	4	M 16	320	288	349	328	20	100	22,4
DN200-8"	218	252	200	4	M 16	320	288	372	328	20	100	25,4
DN250-10"	266	300	200	6	M 16	320	288	426	328	20	100	31,8
DN300-12"	315	350	200	6	M 16	320	288	471	328	20	105	36,7