

CAST IRON SWING CHECK VALVE FLANGED PN16 DIN3202-1 F6 EPDM GASKET

Cast iron swing check valve with EPDM gasket flanged PN10/16 for heating, water distribution and watering.
Cast iron body and disc, graphite bonnet gasket.
Bolted bonnet for an easy maintenance.

Certificate**3.1****Size :** DN40 to DN300**Connection :** Flanges RF PN10/16**Min Temperature :** -10°C**Max Temperature :** +80°C**Max Pressure :** 16 Bars**Specifications :** Swing check type

Brass seat and EPDM gasket

Bolted bonnet

Vertical or horizontal position

Materials : Cast iron body EN GJL-250

CAST IRON SWING CHECK VALVE FLANGED PN16 DIN3202-1 F6 EPDM GASKET

SPECIFICATIONS :


- Swing check type
- Vertical position with ascendant fluid or horizontal position (respect the flow direction indicated by the arrow)
- PN16 flanges R.F.
- Bolted bonnet
- Brass seat
- EPDM gasket
- Painting Alkyde RAL 7011 grey color, 90 µm thickness

USE :

- Heating, water distribution and watering
- For common liquids of 2nd group
- Min and max Temperature Ts : - 10°C to + 80°C
- Max pressure Ps : 16 bars
- **Do not use with pulsatory speed**
- **Max Speed : 3 M. / Sec.**

CAST IRON SWING CHECK VALVE FLANGED PN16 DIN3202-1 F6 EPDM GASKET

HEAD LOSS GRAPH :

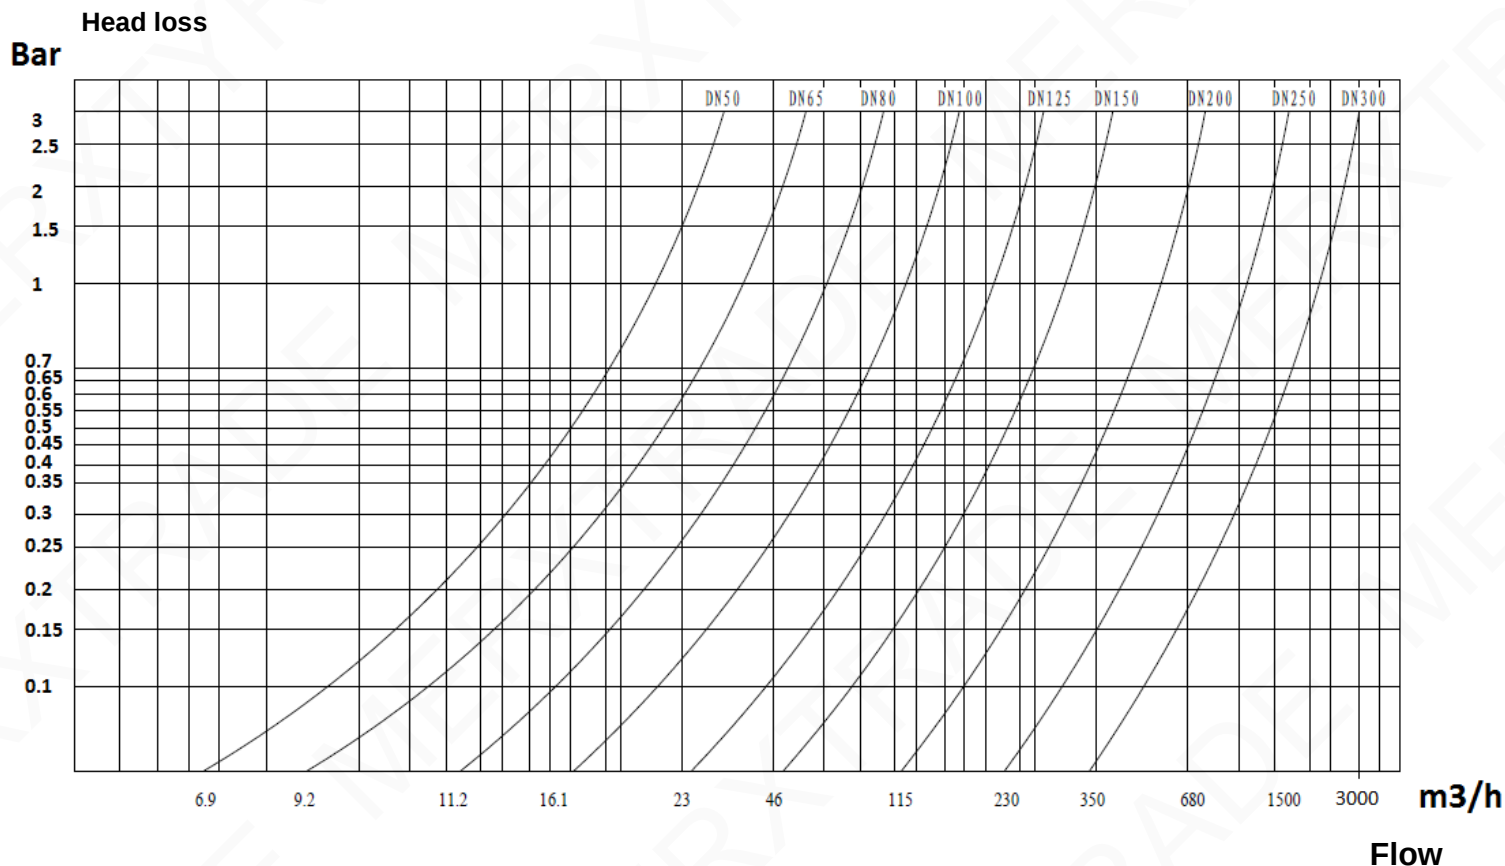

FLOW COEFFICIENT Kvs (M3 / h) :


DN	50	65	80	100	125	150	200	250	300
Kvs (m3/h)	21,5	38	76	115	213	328	578	1226	2318

RANGE :

- Cast iron swing check valve with EPDM gasket PN16 R.F. flanges **Ref. 362** from DN40 to 300

CAST IRON SWING CHECK VALVE FLANGED PN16 DIN3202-1 F6 EPDM GASKET


MATERIALS :

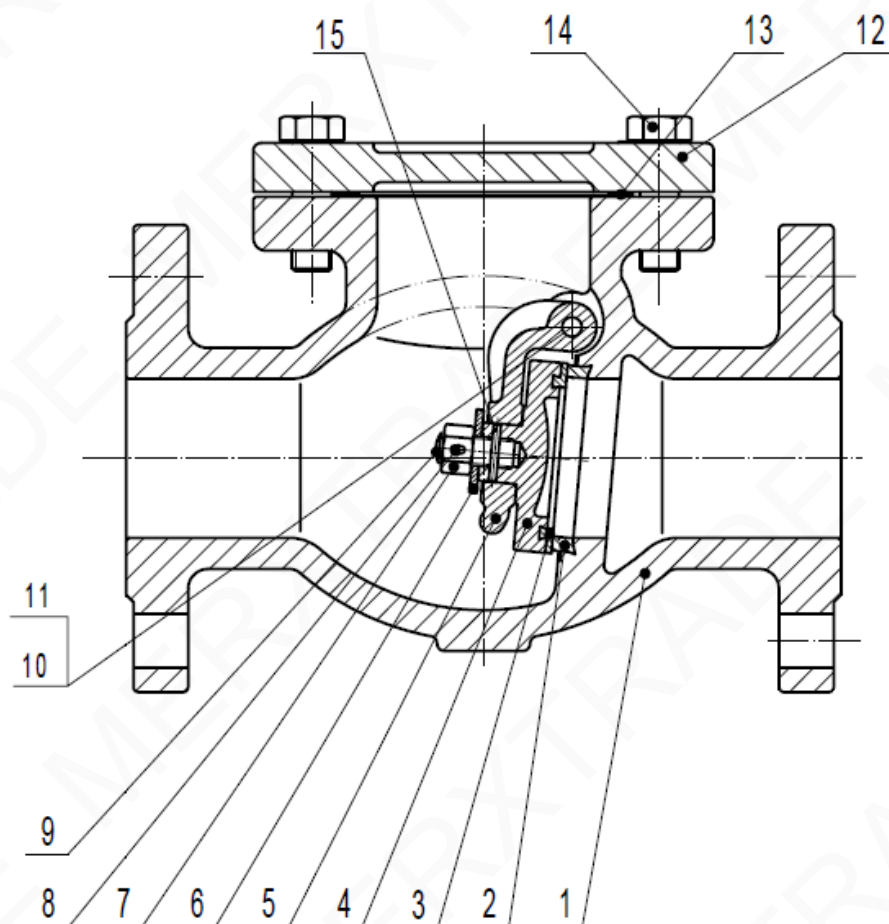

Item	Designation	Materials
1	Body	Cast iron EN GJL-250
2	Seat ring	Brass
3	Disc gasket	EPDM
4	Disc	Cast iron EN GJL-250
5	Hanger	Ductile iron EN GJS-400-15
6	Washer	Steel
7	Nut	Steel
8	Split Pin	AISI 304
9	Disc screw	Steel
10	Hexagon plug	Brass
11	Hanger pin	AISI 304
12	Bonnet	Cast iron EN GJL-250
13	Bonnet gasket	Graphite
14	Bonnet screw	Steel
15	Pin	AISI 304


CAST IRON SWING CHECK VALVE FLANGED PN16 DIN3202-1 F6 EPDM GASKET

SIZE (in mm) :

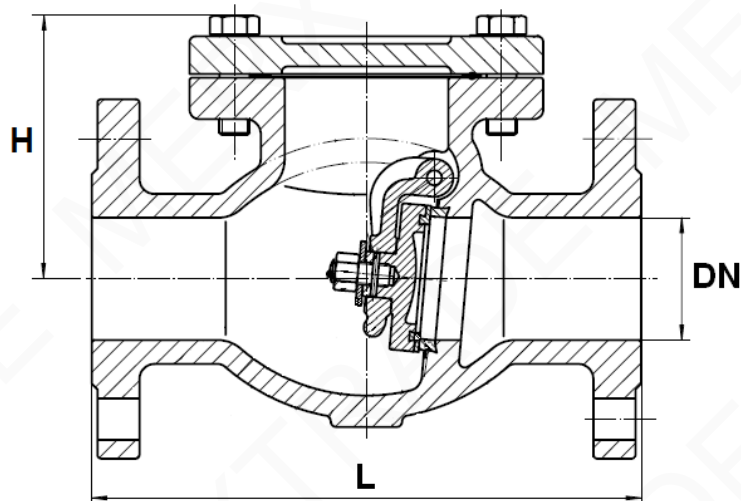

DN	40	50	65	80	100	125	150	200	250	300
L	180	200	240	260	300	350	400	500	600	700
H	109	112	132	141	162	192	211	270	316	357
Weight (Kg)	8.5	11.2	15.5	19	28.5	42.2	57	93	159	215
Ref.	362040	362050	362065	362080	362100	362125	362150	362200	362250	362300




FLANGES SIZE (in mm) :

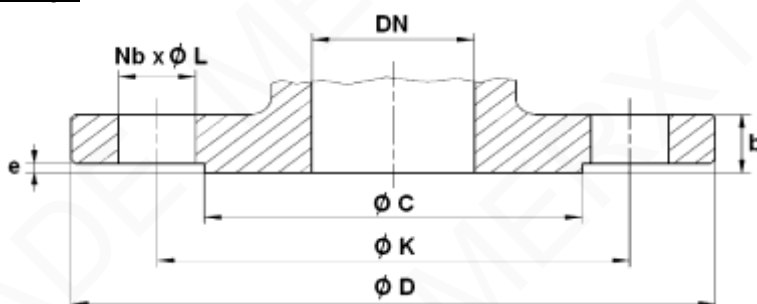

PN	PN10/16							PN16		
DN	40	50	65	80	100	125	150	200	250	300
Ø C	84	99	118	132	156	184	211	266	319	370
Ø D	150	165	185	200	220	250	285	340	405	460
Ø K	110	125	145	160	180	210	240	295	355	410
Nb x Ø L	4 x 19	4 x 19	4 x 19	8 x 19	8 x 19	8 x 19	8 x 23	12 x 23	12 x 28	12 x 28
b	18	20	20	22	24	26	26	30	32	32
e	3	3	3	3	3	3	3	3	3	4

CAST IRON SWING CHECK VALVE FLANGED PN16 DIN3202-1 F6 EPDM GASKET**STANDARDS :**

- Manufacturer certified ISO 9001: 2015
- DIRECTIVE 2014/68/EU : Products excluded (article 4, § 3)
- Design according to DIN EN 12334
- Certificate 3.1 on request
- Pressure tests according to EN 12266-1, Rate A
- Length according to EN 558 series 48 (DIN 3202 F6)
- PN16 R.F. flanges according to EN 1092-2

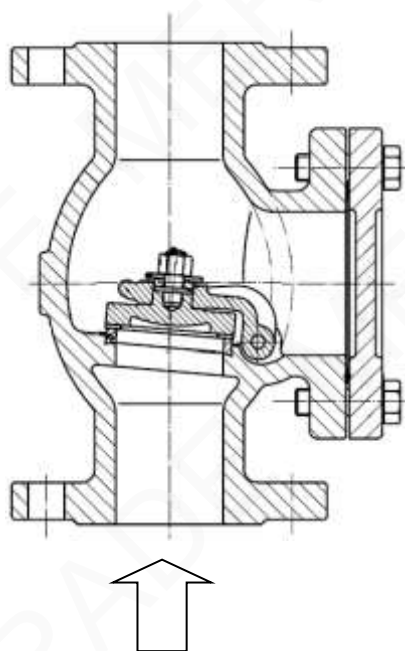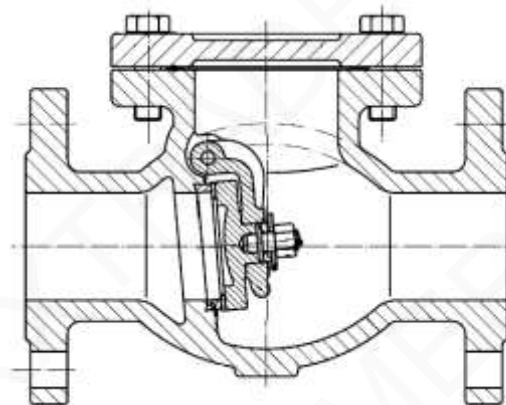INSTALLATION POSITIONS :**Vertical position (ascendant fluid)****Horizontal position**

ADVICE : Our opinion and our advice are not guaranteed and merxtrade shall not be liable for the consequences of damages. The customer must check the right choice of the products with the real service conditions.