

STAINLESS STEEL STRAINER BASKET



Size : DN 3/8" to 4"
Ends : Male BSP
Min Temperature : + 0°C
Max Temperature : + 150°C (For all stainless steel type)
Specifications : Threaded nylon or stainless steel

Materials : Stainless steel strainer

STAINLESS STEEL STRAINER BASKET

SPECIFICATIONS :

- Nylon or stainless steel threaded
- Male BSP ends

USE :

- For all common fluids
- Min and max Temperature Ts : + 0°C to +150°C for all stainless steel type **Ref.MXT-1019391**
- Min and max Temperature Ts : + 0°C to +95°C for nylon threaded with stainless steel type **Ref.MXT-1019392**

RANGE :


- BSP male threaded, all stainless steel from DN 3/8" to DN 4" **Ref.MXT-1019391**
- BSP male threaded, nylon threaded and stainless steel strainer from DN 3/8" to DN 4" **Ref.MXT-1019392**

MATERIALS :

MXT-1019391




MXT-1019392

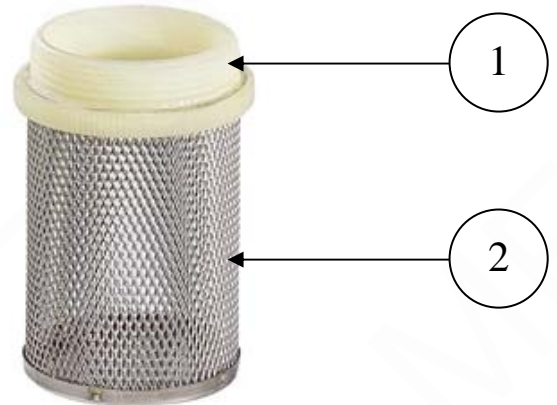

Item	Designation	Materials Ref.MXT-1019391	Materials Ref.MXT-1019392
1	Threaded	AISI 316	Nylon
2	Mesh	AISI 316	AISI 304L


STAINLESS STEEL STRAINER BASKET

SIZE ALL STAINLESS STEEL TYPE REF.MXT-1019391 (in mm) :

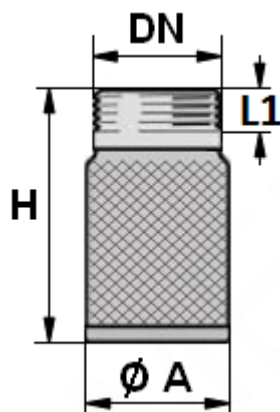

Ref.	DN	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"	4"
391	H	55	55	62	71	80	90	101	111	125	144
	L1	8	10	10	11	15	15	15	18	17	20
	Ø A	19	22	28	36	43	49	60	79	92	115
	Mesh	1	1	1	1	1	1	1	1,8	1,8	1,8
	Weight (Kg)	0.011	0.022	0.032	0.050	0.060	0.075	0.090	0.180	0.200	0.355

SIZE NYLON THREADED WITH STAINLESS STEEL STRAINER TYPE REF.MXT-1019391 (in mm) :

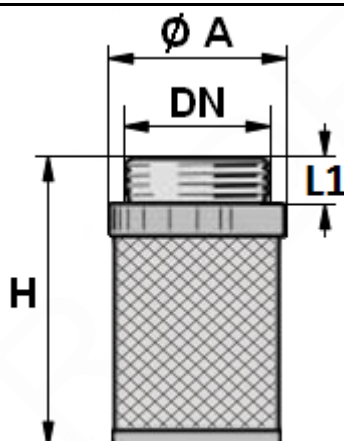

Ref.	DN	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"	4"
392	H	49	50	57	63	68	79	95	96	113	128
	L1	7	8	10	11	10	11	12	12	15	13
	Ø A	24	28	32	41	50	55	67	86	99	122
	Mesh	1.2	1.2	1.2	1.2	1.2	1.2	2	2	2	2
	Weight (Kg)	0.008	0.010	0.017	0.025	0.034	0.042	0.064	0.095	0.130	0.168

STAINLESS STEEL STRAINER BASKET

STANDARDS :

- Fabrication according to ISO 9001 :2008
- DIRECTIVE 97/23/CE : Products excluded from directive (article 1, § 3.2)
- Threaded male BSP cylindrical ends according to ISO 228-1

ADVICE : Our opinion and our advice are not guaranteed and MXT shall not be liable for the consequences of damages. The customer must check the right choice of the products with the real service conditions.