


## LUG TYPE LEVER OPERATED




# LUG TYPE - LEVER OPERATED DN40 - DN200

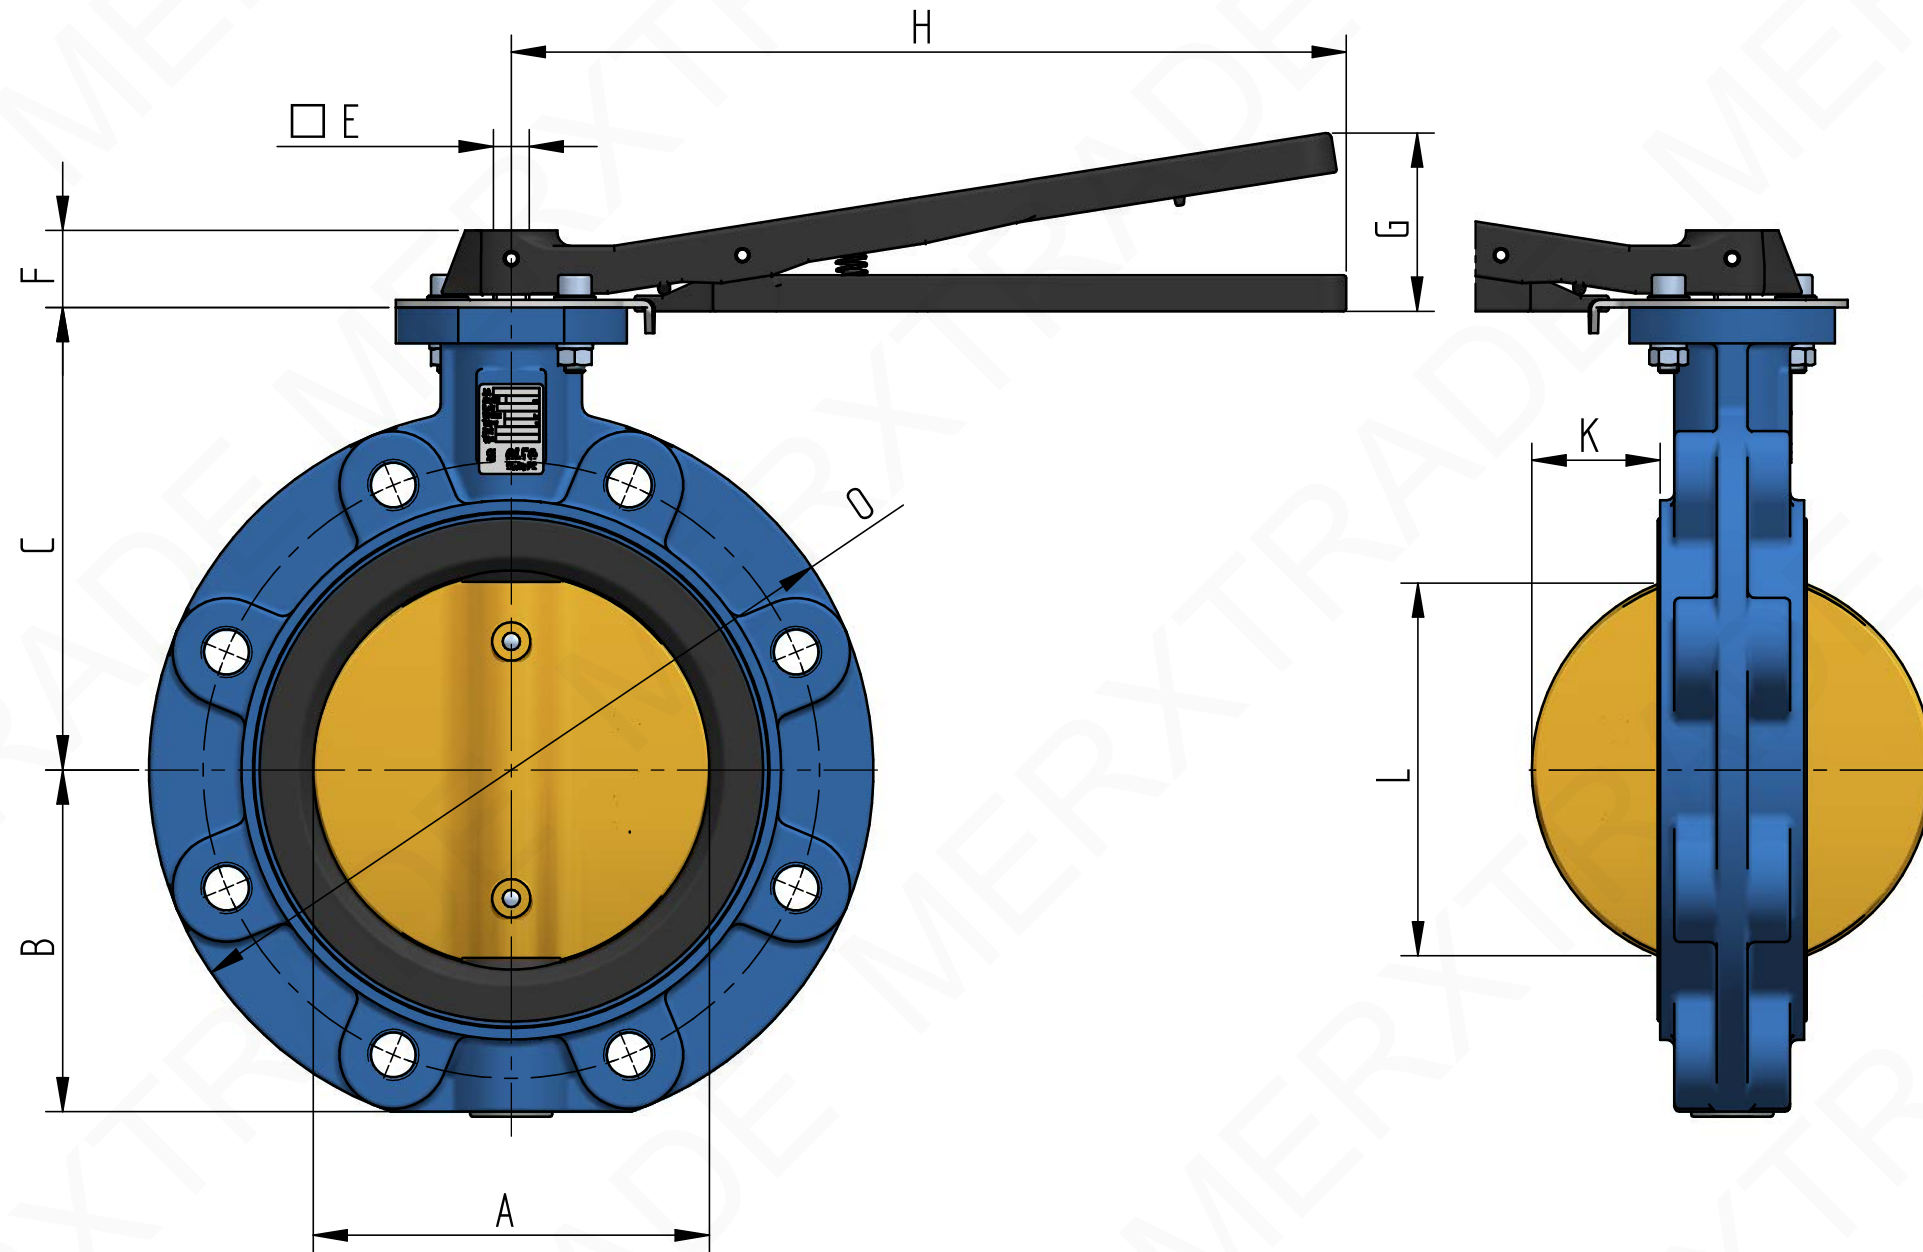

Size DN40 to DN200, Design EN593  
Face to face acc. EN558.1 series 20  
Flange connections: DIN PN6-10-16-25  
ANSI B 16.5 Cl. 150#, JIS B 2211 5K, 10K  
Temperature -40/+250°C  
Various pressure ratings up to 25 bar  
Top flange according ISO 5211  
Vacuum to 1\*10<sup>-3</sup> 0.2 Torr absolute

## Standard available materials :

BODY	DISC	SHAFT	SEAT
EN-JS1030	BS 1400 AB2	SS 1.4122	NBR -15°C / +80°C
A216 WCB	EN-JS1030	SS 431	EPDM -30°C / +110°C
SS 1.4408	SS 1.4408	SS 1.4462	Viton -0°C / +200°C
BS 1400 AB2	SD 2507	SD F53	Silicone -20°C / +250°C

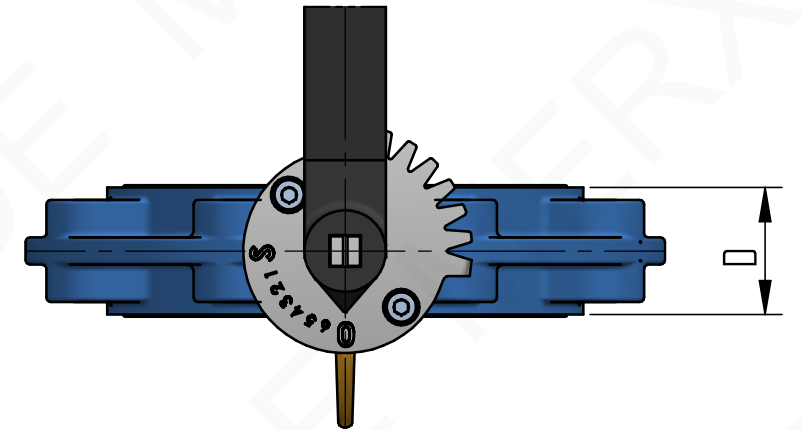

Size	A	B	C	D	E	F	G	H	K	L	O	Weight ± Kg
DN 40	41	58	113	33	[ ] 11	26	56	223	5	27	147	3.4
DN 50	52	65	118	43	[ ] 11	26	56	223	5	31	162	4.6
DN 65	63	73	126	46	[ ] 11	26	56	223	9	45	182	5.5
DN 80	78	95	133	46	[ ] 11	26	56	223	16	64	197	7.1
DN 100	103	102	147	52	[ ] 11	26	56	223	26	90	217	8.7
DN 125	125	116	160	56	[ ] 14	28	68	325	34	110	247	11.6
DN 150	155	133	180	56	[ ] 14	28	68	325	50	146	282	14.2
DN 200	201	160	204	60	[ ] 17	30	68	325	71	194	337	19.4