


Flanges-Welding-Steel-Flat-DIN.2576



Body material	Steel-C22.8
Connection size	DIN
Pressure rating	PN 10 (16)
Operation	Welding
Note	

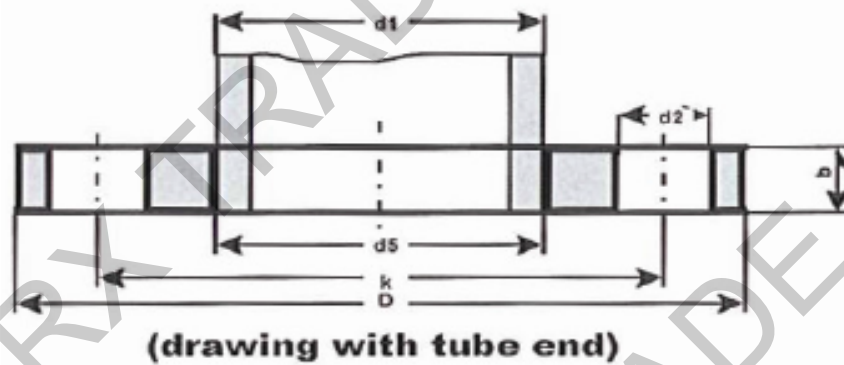

DN	d1	d5	D	b	k	d2	Bolts	Weight
15	21,3	22,0	95	14	65	14	4	0,67
20	26,9	27,6	105	16	75	14	4	0,94
25	33,7	34,4	115	16	85	14	4	1,11
32	42,4	43,1	140	16	100	18	4	1,62
40	48,3	49,0	150	16	110	18	4	1,86
50	60,3	61,1	165	18	125	18	4	2,47
65	76,1	77,1	185	18	145	18	4	3,00
80	88,9	90,3	200	20	160	18	8	3,79
100	108,0	109,6	220	20	180	18	8	4,20
100	114,3	115,9	220	20	180	18	8	4,03
125	133,0	134,8	250	22	210	18	8	5,71
125	139,7	141,6	250	22	210	18	8	5,46
150	168,3	170,5	285	22	240	22	8	6,57
200	219,1	221,8	340	24	295	22	8	9,31
200	219,1	221,8	340	24	295	22	12	10,90
250	273,0	276,2	395	26	350	22	12	11,90
250	273,0	276,2	405	26	355	26	12	18,00
300	323,9	327,6	445	26	400	22	12	13,80
300	323,9	327,6	460	26	410	26	12	21,50
350	355,6	359,7	505	28	460	22	16	20,60
400	406,4	411,0	565	32	515	26	16	27,90
500	508,0	513,6	670	38	620	26	20	41,10
600	609,6	614,0	780	28	725	30	20	39,00

Information provided as an indication and subject to possible modification