


Thread flange DIN 2566

Thread flange DIN 2566 PN10/16 Black steel




Thread BSPP (Rp, internal parallel)
 Drilling PN10/16

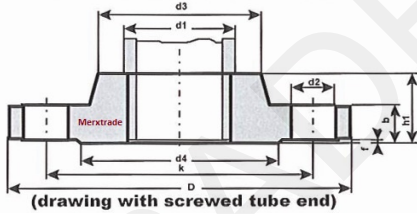

Art. code	Description	DN	d1	thread	D	h1	d3	d4	b	k	f	d2	Bolts	Weight
MXT-1012566010	Thread flange DIN 2566 Black steel - 3/8"	10	17,2	R 3/8	90	20	30	40	14	60	2	14	4	0,54
MXT-1012566015	Thread flange DIN 2566 Black steel - 1/2"	15	21,3	R 1/2	95	20	35	45	14	65	2	14	4	0,61
MXT-1012566020	Thread flange DIN 2566 Black steel - 3/4"	20	26,9	R 3/4	105	24	45	58	16	75	2	14	4	0,91
MXT-1012566025	Thread flange DIN 2566 Black steel - 1"	25	33,7	R 1	115	24	52	68	16	85	2	14	4	1,10
MXT-1012566032	Thread flange DIN 2566 Black steel - 5/4"	32	42,4	R 5/4	140	26	60	78	16	100	2	18	4	1,60
MXT-1012566040	Thread flange DIN 2566 Black steel - 1.1/2"	40	48,3	R 1 1/2	150	26	70	88	16	110	3	18	4	1,78
MXT-1012566050	Thread flange DIN 2566 Black steel - 2"	50	60,3	R 2	165	28	85	102	18	125	3	18	4	2,43
MXT-1012566065	Thread flange DIN 2566 Black steel - 2.1/2"	65	76,1	R 2 1/2	185	32	105	122	18	145	3	18	4	3,18
MXT-1012566080	Thread flange DIN 2566 Black steel - 3"	80	88,9	R 3	200	34	118	138	20	160	3	18	8	4,12
MXT-1012566100	Thread flange DIN 2566 Black steel - 4"	100	114,3	R 4	220	38	140	158	20	180	3	18	8	4,47
MXT-1012566125	Thread flange DIN 2566 Black steel - 5"	125	139,7	R5	250	40	170	188	22	210	3	18	8	6,13

Thread flange DIN 2566 PN10/16 Zinc plated steel

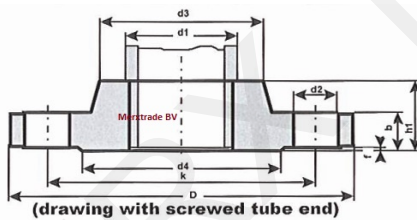

Thread BSPP (Rp, internal parallel)
 Drilling PN10/16



Art. code	Description	DN	d1	D	b	k	h1	d3	s	h2	d4	f	Bolts	weight
MXT-1022566010	Thread flange DIN 2566 Zinc plated steel - 3/8"	10	17,2	R 3/8	90	20	30	40	14	60	2	14	4	0,54
MXT-1022566015	Thread flange DIN 2566 Zinc plated steel - 1/2"	15	21,3	R 1/2	95	20	35	45	14	65	2	14	4	0,61
MXT-1022566020	Thread flange DIN 2566 Zinc plated steel - 3/4"	20	26,9	R 3/4	105	24	45	58	16	75	2	14	4	0,91
MXT-1022566025	Thread flange DIN 2566 Zinc plated steel - 1"	25	33,7	R 1	115	24	52	68	16	85	2	14	4	1,10
MXT-1022566032	Thread flange DIN 2566 Zinc plated steel - 5/4"	32	42,4	R 5/4	140	26	60	78	16	100	2	18	4	1,60
MXT-1022566040	Thread flange DIN 2566 Zinc plated steel - 1.1/2"	40	48,3	R 1 1/2	150	26	70	88	16	110	3	18	4	1,78
MXT-1022566050	Thread flange DIN 2566 Zinc plated steel - 2"	50	60,3	R 2	165	28	85	102	18	125	3	18	4	2,43
MXT-1022566065	Thread flange DIN 2566 Zinc plated steel - 2.1/2"	65	76,1	R 2 1/2	185	32	105	122	18	145	3	18	4	3,18
MXT-1022566080	Thread flange DIN 2566 Zinc plated steel - 3"	80	88,9	R 3	200	34	118	138	20	160	3	18	8	4,12
MXT-1022566100	Thread flange DIN 2566 Zinc plated steel - 4"	100	114,3	R 4	220	38	140	158	20	180	3	18	8	4,47
MXT-1022566125	Thread flange DIN 2566 Zinc plated steel - 5"	125	139,7	R5	250	40	170	188	22	210	3	18	8	6,13